

OF

ELGI[®]
Always Better.


45 - 450



OF Series

100% Class '0' |

ELGi OF (Oil Free)

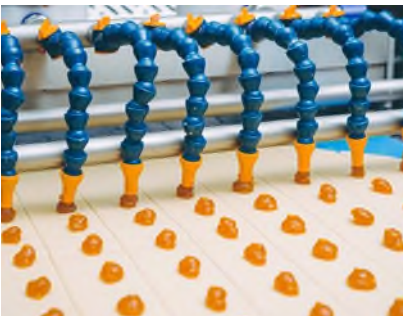









2



ELGi Oil Free

A large, industrial-grade ELGi Oil Free compressor unit is shown in a dark, modern setting. The unit is white with black accents and has the ELGi logo prominently displayed on its side. The background consists of dark, textured panels, possibly part of a control room or a specialized facility.

-  100% Class-0 
-  
-  
-  

ELGi —

-V-

OF

OILFREE™


CLASS-0 ISO 8573-1

Class '0' Oil Free

OF


«0» ISO 8573-1.



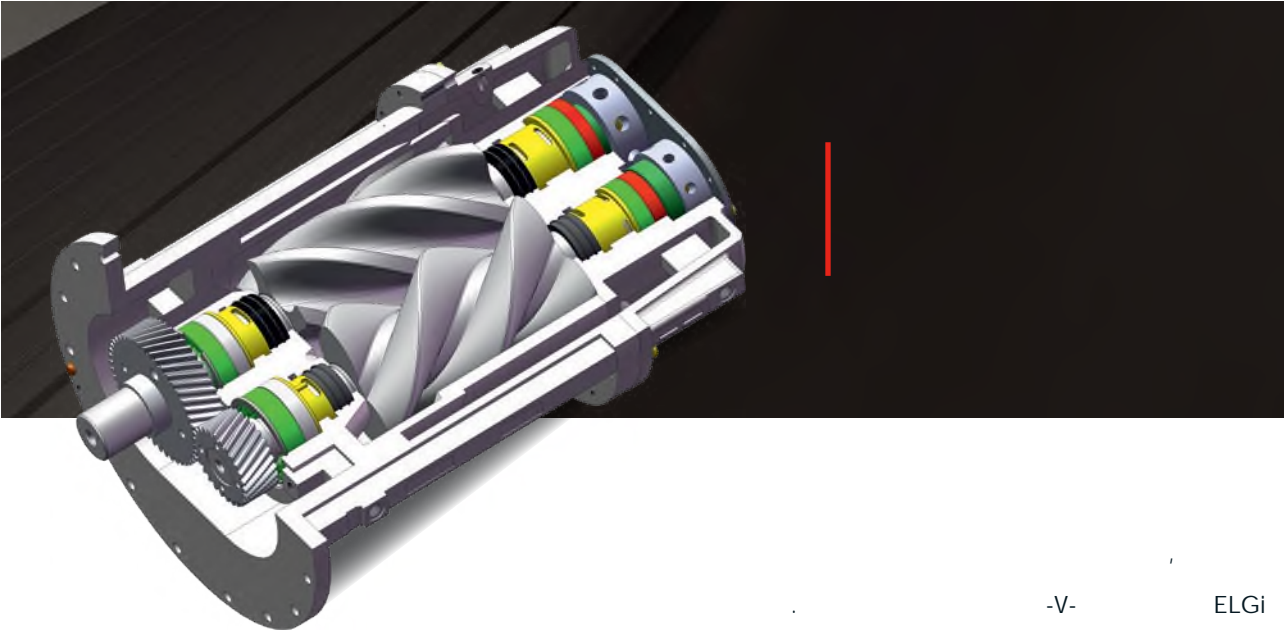

-V-

ELGi

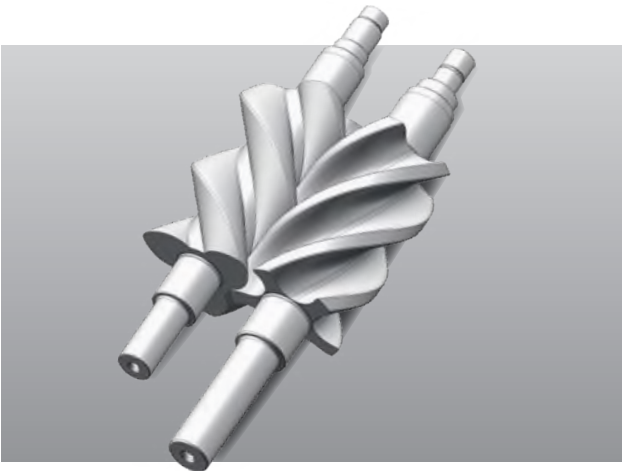



ELGi

ELGi
250

OF

8


ELGi OF,

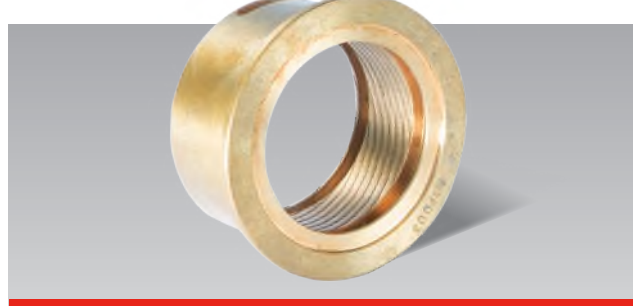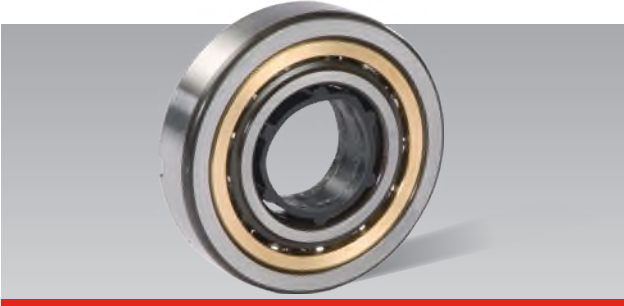

Visco



pp^o

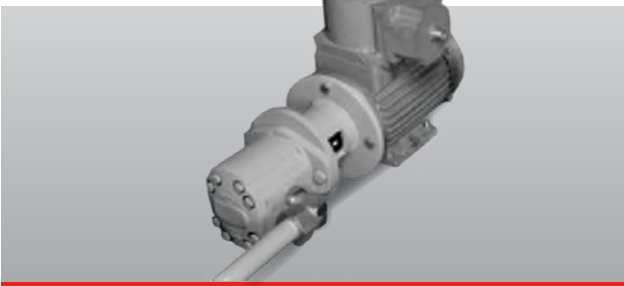

DIM 4

()



ELGi's OF




-5 45

(ROI).

(PLC) 15+

1. C
- 2.
- 3.

Modbus.

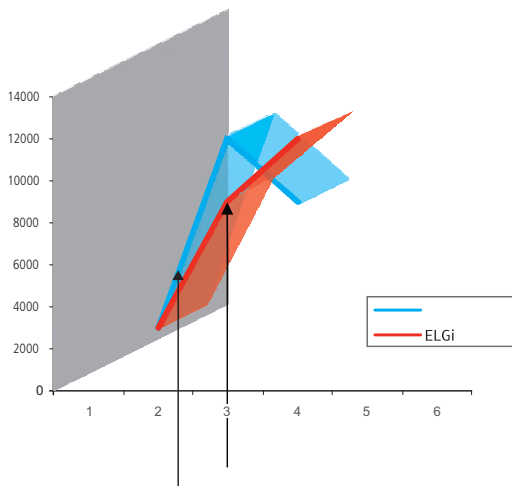



0,2

(-5°C...45°C)


ELGi OF




VFD

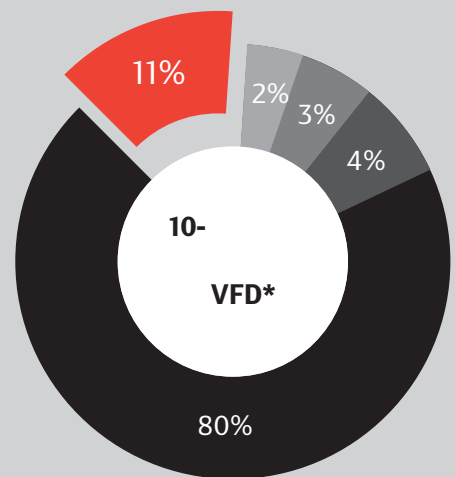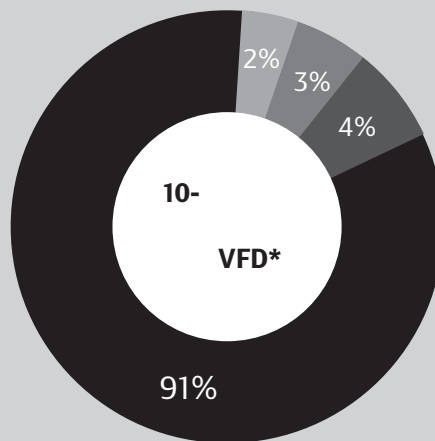

2-

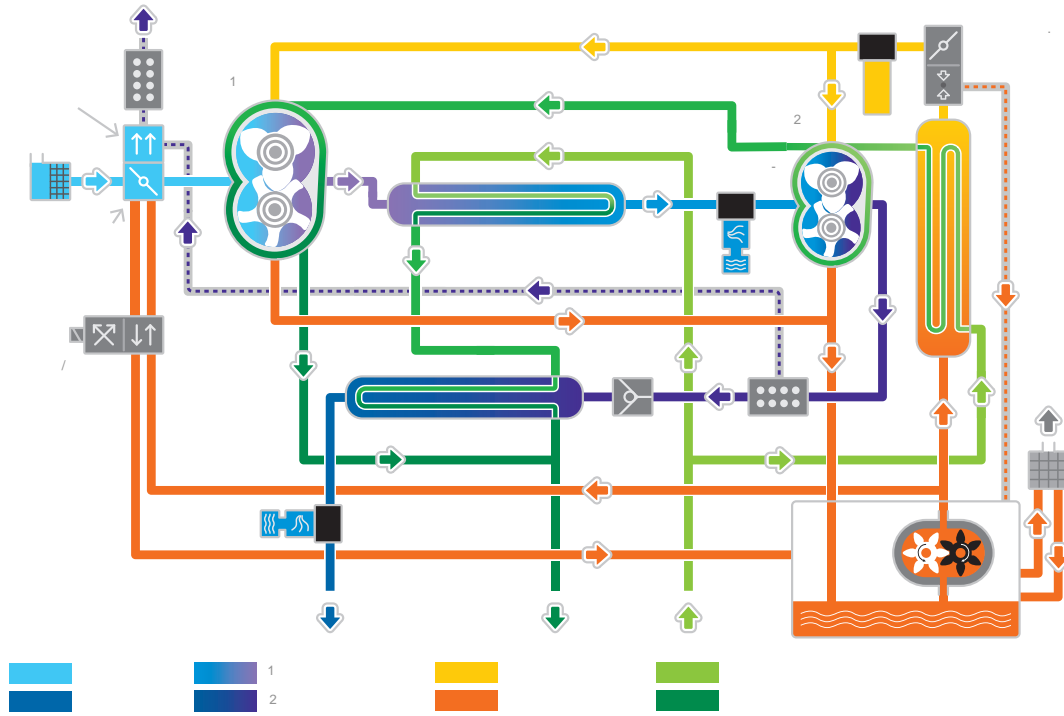

2-

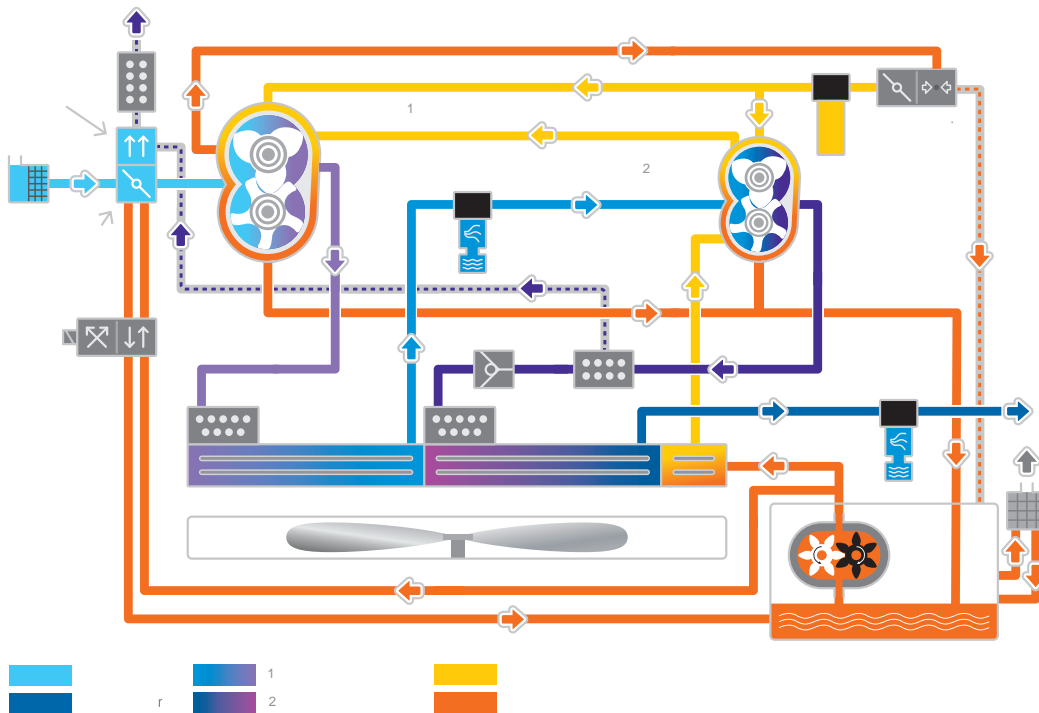

- OF

(50)

								(x x)	
50				psi	cfm	³ /		()	
OF 45	45	60	7.0	100.0	235	6.65	2600	78 ± 3	2200 x 1250 x 2000
	45	60	8.8	125.0	190	5.38	2600	78 ± 3	2200 x 1250 x 2000
OF 55	55	75	7.0	100.0	295	8.40	2600	78 ± 3	2200 x 1250 x 2000
	55	75	8.8	125.0	257	7.30	2600	78 ± 3	2200 x 1250 x 2000
	55	75	10.0	145.0	193	5.46	2600	78 ± 3	2200 x 1250 x 2300
OF 75	75	100	7.0	100.0	410	11.61	2600	78 ± 3	2200 x 1250 x 2000
	75	100	8.8	125.0	360	10.20	2600	78 ± 3	2200 x 1250 x 2000
	75	100	10.0	145.0	295	8.35	2600	78 ± 3	2200 x 1250 x 2300
OF 90	90	125	7.0	100.0	568	16.08	4800	82 ± 3	2950 x 1850 x 2270
	90	125	8.0	115.0	509	14.41	4800	82 ± 3	2950 x 1850 x 2270
	90	125	8.8	125.0	485	13.73	4800	82 ± 3	2950 x 1850 x 2270
	90	125	10.0	145.0	403	11.40	4800	82 ± 3	2950 x 1850 x 2570
OF 110	110	150	7.0	100.0	654	18.52	4800	82 ± 3	2950 x 1850 x 2270
	110	150	8.0	115.0	592	16.76	4800	82 ± 3	2950 x 1850 x 2270
	110	150	8.8	125.0	560	15.86	4800	82 ± 3	2950 x 1850 x 2270
	110	150	10.0	145.0	473	13.39	4800	82 ± 3	2950 x 1850 x 2570
OF 135	132	200	7.0	100.0	855	24.21	5750	82 ± 3	2950 x 1850 x 2270
	132	200	8.0	115.0	793	22.46	5750	82 ± 3	2950 x 1850 x 2270
	132	200	8.8	125.0	754	21.35	5750	82 ± 3	2950 x 1850 x 2270
OF 145	160	250	7.0	100.0	889	25.17	5750	82 ± 3	2950 x 1850 x 2270
	160	250	8.0	115.0	824	23.33	5750	82 ± 3	2950 x 1850 x 2270
	160	250	8.8	125.0	785	22.23	5750	82 ± 3	2950 x 1850 x 2270
	160	250	10.0	145.0	680	19.24	5750	82 ± 3	2950 x 1850 x 2570
OF 170	160	250	7.0	100.0	1050	29.73	5750	82 ± 3	2950 x 1850 x 2270
	160	250	8.0	115.0	999	28.29	5750	82 ± 3	2950 x 1850 x 2270
	160	250	8.8	125.0	957	27.10	5750	82 ± 3	2950 x 1850 x 2270
	160	250	10.0	145.0	802	22.70	5750	82 ± 3	2950 x 1850 x 2570
OF 200	200	300	7.0	100.0	1307	37.00	7042	85 ± 3	5200 x 2000 x 2050
	200	300	8.0	115.0	1208	34.20	7042	85 ± 3	5200 x 2000 x 2050
	200	300	8.8	125.0	1198	33.92	7042	85 ± 3	5200 x 2000 x 2050
OF 210	250	300	7.0	100.0	1428	40.40	7042	85 ± 3	5200 x 2000 x 2050
	250	300	8.0	115.0	1346	38.10	7042	85 ± 3	5200 x 2000 x 2050
	250	300	8.8	125.0	1297	36.70	7042	85 ± 3	5200 x 2000 x 2050
	250	300	10.0	145.0	1173	33.20	7042	85 ± 3	5200 x 2000 x 2050

(50)

50				psi	cfm	³ /		d ()	(x x)
OF 250	250	300	7.0	100.0	1481	41.90	7930	85 ± 3	5200 x 2000 x 2050
	250	300	8.0	115.0	1388	39.30	7930	85 ± 3	5200 x 2000 x 2050
	250	300	8.8	125.0	1337	37.90	7930	85 ± 3	5200 x 2000 x 2050
	250	300	10.0	145.0	1210	34.24	7930	85 ± 3	5200 x 2000 x 2050
OF 265	275	350	7.0	100.0	1597	45.20	7930	85 ± 3	5200 x 2000 x 2050
	275	350	8.0	115.0	1504	42.60	7930	85 ± 3	5200 x 2000 x 2050
	275	350	8.8	125.0	1405	39.80	7930	85 ± 3	5200 x 2000 x 2050
	275	350	10.0	145.0	1278	36.17	7930	85 ± 3	5200 x 2000 x 2050
OF 275	315	350	7.0	100.0	1645	46.60	7930	85 ± 3	5200 x 2000 x 2050
	315	350	8.0	115.0	1550	43.90	7930	85 ± 3	5200 x 2000 x 2050
	315	350	8.8	125.0	1495	42.30	7930	85 ± 3	5200 x 2000 x 2050
	315	350	10.0	145.0	1354	38.09	7930	85 ± 3	5200 x 2000 x 2050
OF 300	315	400	7.0	100.0	1741	49.30	7930	85 ± 3	5200 x 2000 x 2050
	315	400	8.0	115.0	1641	46.50	7930	85 ± 3	5200 x 2000 x 2050
	315	400	8.8	125.0	1588	45.00	7930	85 ± 3	5200 x 2000 x 2050
	315	400	10.0	145.0	1400	39.62	7930	85 ± 3	5200 x 2000 x 2050

1. (FAD) ISO 1217 : 2009 - Annex C

2. F

3.

4.

5.

6. VFD

7. +3°C to 45°C

8. ISO 2151, Second Edition 1 , +/--3dB(A)

9. ABNT, NEMA and IEC

- OF

(50)

50				psi	cfm	³ /		()	(x x)
OF 45	45	60	7.0	100.0	235-132	6.70	2600	78 ± 3	2200 x 1250 x 2000
	45	60	8.0	115.0	205-181	5.80	2600	78 ± 3	2200 x 1250 x 2000
	45	60	8.8	125.0	190	5.38	2600	78 ± 3	2200 x 1250 x 2000
OF 55	55	75	7.0	100.0	220-295	6.2-8.4	2600	78 ± 3	2200 x 1250 x 2000
	55	75	8.0	115.0	216-268	6.1-7.6	2600	78 ± 3	2200 x 1250 x 2000
	55	75	8.8	125.0	212-257	6.0-7.2	2600	78 ± 3	2200 x 1250 x 2000
OF 75	75	100	7.0	100.0	208-410	5.8-11.6	2600	78 ± 3	2200 x 1250 x 2000
	75	100	8.0	115.0	213-382	6.0-10.8	2600	78 ± 3	2200 x 1250 x 2000
	75	100	8.8	125.0	211-360	5.9-10.2	2600	78 ± 3	2200 x 1250 x 2000
	75	100	10.0	145.0	187-295	5.36-8.35	2600	78 ± 3	2200 x 1250 x 2300
OF 90	90	125	7.0	100.0	380-568	10.7-16.0	4800	82 ± 3	2950 x 1850 x 2270
	90	125	8.0	115.0	400-509	11.3-14.4	4800	82 ± 3	2950 x 1850 x 2270
	90	125	8.8	125.0	370-485	10.4-13.7	4800	82 ± 3	2950 x 1850 x 2270
OF 110	110	150	7.0	100.0	390-654	11.0-18.5	4800	82 ± 3	2950 x 1850 x 2270
	110	150	8.0	115.0	430-592	12.1-16.7	4800	82 ± 3	2950 x 1850 x 2270
	110	150	8.8	125.0	455-560	12.8-15.8	4800	82 ± 3	2950 x 1850 x 2270
	110	150	10.0	145.0	400-473	11.3-13.3	4800	82 ± 3	2950 x 1850 x 2570
OF 135	132	200	7.0	100.0	694-855	19.6-24.2	5750	82 ± 3	2950 x 1850 x 2270
	132	200	8.0	115.0	678-793	19.2-22.4	5750	82 ± 3	2950 x 1850 x 2270
	132	200	8.8	125.0	694-754	19.6-21.3	5750	82 ± 3	2950 x 1850 x 2270
OF 145	160	250	7.0	100.0	718-889	20.3-25.1	5750	82 ± 3	2950 x 1850 x 2270
	160	250	8.0	115.0	716-824	20.2-23.3	5750	82 ± 3	2950 x 1850 x 2270
	160	250	8.8	125.0	711-785	20.1-22.2	5750	82 ± 3	2950 x 1850 x 2270
OF 170	160	250	7.0	100.0	526-1050	14.7-29.7	5750	82 ± 3	2950 x 1850 x 2270
	160	250	8.0	115.0	670-999	18.9-28.2	5750	82 ± 3	2950 x 1850 x 2270
	160	250	8.8	125.0	652-957	18.4-27.1	5750	82 ± 3	2950 x 1850 x 2270
	160	250	10.0	145.0	650-802	18.4-22.7	5750	82 ± 3	2950 x 1850 x 2570
OF 200	200	300	7.0	100.0	1121-1307	31.3-36.6	7930	80 ± 3	5200 x 2000 x 2050
	200	300	8.0	115.0	1107-1208	31.0-33.8	7930	80 ± 3	5200 x 2000 x 2050
	200	300	8.8	125.0	1135-1198	31.7-33.5	7930	80 ± 3	5200 x 2000 x 2050
OF 210	250	300	7.0	100.0	1062-1428	29.7-40.0	7930	80 ± 3	5200 x 2000 x 2050
	250	300	8.0	115.0	1067-1346	29.8-37.6	7930	80 ± 3	5200 x 2000 x 2050
	250	300	8.8	125.0	1065-1297	29.8-36.3	7930	80 ± 3	5200 x 2000 x 2050
OF 250	250	300	7.0	100.0	1068-1481	29.9-41.4	7930	80 ± 3	5200 x 2000 x 2050
	200	300	8.0	115.0	911-1388	25.5-38.8	7930	80 ± 3	5200 x 2000 x 2050
	200	300	8.8	125.0	1064-1337	29.8-37.4	7930	80 ± 3	5200 x 2000 x 2050
OF 265	275	350	7.0	100.0	1049-1597	29.3-44.7	7930	80 ± 3	5200 x 2000 x 2050
	275	350	8.0	115.0	1035-1504	29.0-42.1	7930	80 ± 3	5200 x 2000 x 2050
	275	350	8.8	125.0	1033-1405	28.9-39.3	7930	80 ± 3	5200 x 2000 x 2050
OF 275	275	350	7.0	100.0	948-1645	26.5-46.6	7930	80 ± 3	5200 x 2000 x 2050
	275	350	8.0	115.0	968-1550	27.1-43.4	7930	80 ± 3	5200 x 2000 x 2050
	275	350	8.8	125.0	947-1495	26.5-41.8	7930	80 ± 3	5200 x 2000 x 2050
OF 300	300	400	7.0	100.0	1039-1741	29.0-48.7	7930	80 ± 3	5200 x 2000 x 2050
	300	400	8.0	115.0	1056-1641	29.5-46.0	7930	80 ± 3	5200 x 2000 x 2050
	300	400	8.8	125.0	898-1588	25.1-44.4	7930	80 ± 3	5200 x 2000 x 2050

Refer page 11

(50)

								(x x)	
50			psi	cfm	³ /		()		
OF 90	90	125	7.0	100.0	575	16.28	4500	77 ± 3	2955 x 1650 x 1850
	90	125	8.0	115.0	508	14.38	4500	77 ± 3	2955 x 1650 x 1850
	90	125	8.8	125.0	483	13.67	4500	77 ± 3	2955 x 1650 x 1850
	90	125	10.0	145.0	403	11.41	4500	77 ± 3	2955 x 1650 x 1850
OF 110	110	150	7.0	100.0	678	19.19	4500	77 ± 3	2955 x 1650 x 1850
	110	150	8.0	115.0	603	17.07	4500	77 ± 3	2955 x 1650 x 1850
	110	150	8.8	125.0	568	16.08	4500	77 ± 3	2955 x 1650 x 1850
	110	150	10.0	145.0	473	13.39	4500	77 ± 3	2955 x 1650 x 1850
OF 135	132	200	7.0	100.0	863	24.43	4900	79 ± 3	2955 x 1650 x 1850
	132	200	8.0	115.0	803	22.73	4900	79 ± 3	2955 x 1650 x 1850
	132	200	8.8	125.0	753	21.32	4900	79 ± 3	2955 x 1650 x 1850
OF 145	160	250	7.0	100.0	883	25.00	4900	79 ± 3	2955 x 1650 x 1850
	160	250	8.0	115.0	818	23.16	4900	79 ± 3	2955 x 1650 x 1850
	160	250	8.8	125.0	778	22.03	4900	79 ± 3	2955 x 1650 x 1850
	160	250	10.0	145.0	688	19.48	4900	79 ± 3	2955 x 1650 x 1850
OF 170	160	250	7.0	100.0	1080	30.57	4900	79 ± 3	2955 x 1650 x 1850
	160	250	8.0	115.0	993	28.11	4900	79 ± 3	2955 x 1650 x 1850
	160	250	8.8	125.0	953	26.98	4900	79 ± 3	2955 x 1650 x 1850
	160	250	10.0	145.0	808	22.87	4900	79 ± 3	2955 x 1650 x 1850
OF 200	200	300	7.0	100.0	1363	38.59	6350	80 ± 3	3500 x 1850 x 2050
	200	300	8.0	115.0	1253	35.47	6350	80 ± 3	3500 x 1850 x 2050
	200	300	8.8	125.0	1233	34.91	6350	80 ± 3	3500 x 1850 x 2050
OF 210	250	300	7.0	100.0	1469	41.59	6350	80 ± 3	3500 x 1850 x 2050
	250	300	8.0	115.0	1383	39.15	6350	80 ± 3	3500 x 1850 x 2050
	250	300	8.8	125.0	1328	37.60	6350	80 ± 3	3500 x 1850 x 2050
	250	300	10.0	145.0	1203	34.06	6350	80 ± 3	3500 x 1850 x 2050
OF 250	250	300	7.0	100.0	1521	43.06	6350	80 ± 3	3500 x 1850 x 2050
	250	300	8.0	115.0	1423	40.29	6350	80 ± 3	3500 x 1850 x 2050
	250	300	8.8	125.0	1368	38.73	6350	80 ± 3	3500 x 1850 x 2050
	250	300	10.0	145.0	1248	35.33	6350	80 ± 3	3500 x 1850 x 2050
OF 265	275	350	7.0	100.0	1663	47.08	6350	80 ± 3	3500 x 1850 x 2050
	275	350	8.0	115.0	1563	44.25	6350	80 ± 3	3500 x 1850 x 2050
	275	350	8.8	125.0	1458	41.28	6350	80 ± 3	3500 x 1850 x 2050
	275	350	10.0	145.0	1298	36.75	6350	80 ± 3	3500 x 1850 x 2050

- OF

(50)

50				psi	cfm	³ /		()	(x x)
OF 275	315	350	7.0	100.0	1715	48.55	6350	80 ± 3	3500 x 1850 x 2050
	315	350	8.0	115.0	1613	45.66	6350	80 ± 3	3500 x 1850 x 2050
	315	350	8.8	125.0	1558	44.11	6350	80 ± 3	3500 x 1850 x 2050
	315	350	10.0	145.0	1348	38.16	6350	80 ± 3	3500 x 1850 x 2050
OF 300	315	400	7.0	100.0	1839	52.06	6350	80 ± 3	3500 x 1850 x 2050
	315	400	8.0	115.0	1708	48.35	6350	80 ± 3	3500 x 1850 x 2050
	315	400	8.8	125.0	1653	46.80	6350	80 ± 3	3500 x 1850 x 2050
	315	400	10.0	145.0	1443	40.85	6350	80 ± 3	3500 x 1850 x 2050
OF 355	355	480	7.0	100.0	2003	56.70	9500	85 ± 3	4200 x 2100 x 2550
	355	480	8.0	115.0	1988	56.28	9500	85 ± 3	4200 x 2100 x 2550
	355	480	8.8	125.0	1988	56.28	9500	85 ± 3	4200 x 2100 x 2550
	355	480	10.0	145.0	1771	50.14	9500	85 ± 3	4200 x 2100 x 2550
OF 400	400	550	7.0	100.0	2263	64.07	9500	85 ± 3	4200 x 2100 x 2550
	400	550	8.0	115.0	2263	64.07	9500	85 ± 3	4200 x 2100 x 2550
	400	550	8.8	125.0	2263	64.07	9500	85 ± 3	4200 x 2100 x 2550
	400	550	10.0	145.0	2018	57.13	9500	85 ± 3	4200 x 2100 x 2550
OF 450	450	610	7.0	100.0	2518	71.28	9500	85 ± 3	4200 x 2100 x 2550
	450	610	8.0	115.0	2513	71.14	9500	85 ± 3	4200 x 2100 x 2550
	450	610	8.8	125.0	2513	71.14	9500	85 ± 3	4200 x 2100 x 2550
	450	610	10.0	145.0	2225	63.00	9500	85 ± 3	4200 x 2100 x 2550

Refer page 11

(50)

50				psi	cfm	³ /		()	(x x)
OF 90	90	125	7.0	100.0	372-575	10.5-16.2	4500	77 ± 3	2955 x 1650 x 1850
	90	125	8.0	115.0	366-508	10.3-14.3	4500	77 ± 3	2955 x 1650 x 1850
	90	125	8.8	125.0	366-483	10.3-13.6	4500	77 ± 3	2955 x 1650 x 1850
OF 110	110	150	7.0	100.0	370-678	10.4-19.2	4500	77 ± 3	2955 x 1650 x 1850
	110	150	8.0	115.0	370-603	10.4-17.0	4500	77 ± 3	2955 x 1650 x 1850
	110	150	8.8	125.0	365-568	10.3-16.1	4500	77 ± 3	2955 x 1650 x 1850
	110	150	10.0	145.0	400-473	11.3-13.4	4500	77 ± 3	2955 x 1650 x 1850
OF 135	132	200	7.0	100.0	625-863	17.7-24.4	4900	79 ± 3	2955 x 1650 x 1850
	132	200	8.0	115.0	621-803	17.5-22.7	4900	79 ± 3	2955 x 1650 x 1850
	132	200	8.8	125.0	606-753	17.1-21.3	4900	79 ± 3	2955 x 1650 x 1850
OF 145	160	250	7.0	100.0	625-883	17.7-25.0	4900	79 ± 3	2955 x 1650 x 1850
	160	250	8.0	115.0	621-818	17.6-23.1	4900	79 ± 3	2955 x 1650 x 1850
	160	250	8.8	125.0	608-778	17.2-22.0	4900	79 ± 3	2955 x 1650 x 1850
	160	250	10.0	145.0	650-688	18.4-19.4	4900	79 ± 3	2955 x 1650 x 1850
OF 170	160	250	7.0	100.0	625-1080	17.7-30.5	4900	79 ± 3	2955 x 1650 x 1850
	160	250	8.0	115.0	621-993	17.6-28.1	4900	79 ± 3	2955 x 1650 x 1850
	160	250	8.8	125.0	606-953	17.1-27.0	4900	79 ± 3	2955 x 1650 x 1850
	160	250	10.0	145.0	650-808	18.4-22.9	4900	79 ± 3	2955 x 1650 x 1850
OF 200	200	300	7.0	100.0	923-1363	25.8-38.6	6350	80 ± 3	3500 x 1850 x 2050
	200	300	8.0	115.0	1175-1253	33.2-35.4	6350	80 ± 3	3500 x 1850 x 2050
	200	300	8.8	125.0	1170-1233	33.1-35.0	6350	80 ± 3	3500 x 1850 x 2050
OF 210	250	300	7.0	100.0	1107-1469	31.3-41.6	6350	80 ± 3	3500 x 1850 x 2050
	250	300	8.0	115.0	1105-1383	31.2-39.1	6350	80 ± 3	3500 x 1850 x 2050
	250	300	8.8	125.0	1093-1328	31.0-37.6	6350	80 ± 3	3500 x 1850 x 2050
	250	300	10.0	145.0	1152-1205	32.6-34.11	6350	80 ± 3	3500 x 1850 x 2050
OF 250	250	300	7.0	100.0	1107-1521	31.3-43.0	6350	80 ± 3	3500 x 1850 x 2050
	250	300	8.0	115.0	1104-1423	31.2-40.3	6350	80 ± 3	3500 x 1850 x 2050
	250	300	8.8	125.0	1091-1368	30.8-38.7	6350	80 ± 3	3500 x 1850 x 2050
	250	300	10.0	145.0	1150-1252	32.5-35.4	6350	80 ± 3	3500 x 1850 x 2050
OF 265	275	350	7.0	100.0	1108-1663	31.3-47.0	6350	80 ± 3	3500 x 1850 x 2050
	275	350	8.0	115.0	1106-1563	31.3-44.2	6350	80 ± 3	3500 x 1850 x 2050
	275	350	8.8	125.0	1088-1458	30.8-41.2	6350	80 ± 3	3500 x 1850 x 2050
	275	350	10.0	145.0	1159-1293	32.8-36.6	6350	80 ± 3	3500 x 1850 x 2050

- OF

(50)

								(x x)	
50				psi	cfm	³ /		()	
OF 275	315	350	7.0	100.0	1036-1715	29.3-48.5	6350	80 ± 3	3500 x 1850 x 2050
	315	350	8.0	115.0	1034-1613	29.2-45.6	6350	80 ± 3	3500 x 1850 x 2050
	315	350	8.8	125.0	1010-1558	28.6-44.1	6350	80 ± 3	3500 x 1850 x 2050
	315	350	10.0	145.0	1163-1332	33.0-37.7	6350	80 ± 3	3500 x 1850 x 2050
OF 300	315	400	7.0	100.0	1052-1839	29.8-52.0	6350	80 ± 3	3500 x 1850 x 2050
	315	400	8.0	115.0	911-1708	25.5-48.3	6350	80 ± 3	3500 x 1850 x 2050
	315	400	8.8	125.0	906-1653	25.3-46.8	6350	80 ± 3	3500 x 1850 x 2050
	315	400	10.0	145.0	1147-1450	32.4-41.0	6350	80 ± 3	3500 x 1850 x 2050
OF 400	400	550	7.0	100.0	1371-2263	38.3-64.0	9500	85 ± 3	4200 x 2100 x 2550
	400	550	8.0	115.0	1768-2263	50.0-64.0	9500	85 ± 3	4200 x 2100 x 2550
	400	550	8.8	125.0	1766-2263	50.0-64.0	9500	85 ± 3	4200 x 2100 x 2550
	400	550	10.0	145.0	1598-2018	45.2-57.1	9500	85 ± 3	4200 x 2100 x 2550
OF 450	450	610	7.0	100.0	1375-2518	38.5-71.3	9500	85 ± 3	4200 x 2100 x 2550
	450	610	8.0	115.0	1781-2513	50.4-71.1	9500	85 ± 3	4200 x 2100 x 2550
	450	610	8.8	125.0	1781-2513	50.4-71.1	9500	85 ± 3	4200 x 2100 x 2550
	450	610	10.0	145.0	1579-2225	44.7-63.0	9500	85 ± 3	4200 x 2100 x 2550

Refer page 11



ELGi

ELGi

ELGi

ELGi

ELGi

ELGi

ELGi

ELGi

ELGi





1. CE certified
2. Class "0" ISO:8573(P-2):2007
3. ISO 1217:2009
4. ASME "U" stamping (USA); PED (EU);
Work Cover/ Plant Design Registration
(Australia); DOSH (Malaysia)
5. UL & CE certified
6. FDA approved per EU directive
80/590/EEC & 89/109/EEC



(VFD)

ELGi (VFD)

ELGi VFD

6 ELGi

1. ELGi
- 2.
- 3.
- 4.
- 5.
- 6.



ELGi

Always Better.

Elgi Equipments Limited -

ELGi

400

ELGi

60+

2 Mn+

120+



**DEMING PRIZE
2019**

ELGi -
(Deming Prize)
(Total Quality Management).

ELGI[®]
Always Better.



Дистрибьютор
компрессоров

ELGI[®]
в России и СНГ

ООО «Передовые компрессорные технологии»
141700, Московская область, г. Долгопрудный,
Лихачевский проезд, д.4с1
+7 499 653 82 00 sales@indcomair.ru www.indcomair.ru